

ELECTRIC TELESCOPIC BOOM LIFTS

TB660EJ PLUS

Compliant with ANSI/CSA standards

PRODUCT HIGHLIGHTS

Eco-friendly

■ Offers zero emissions, reduced noise, making it ideal for both indoor and outdoor job sites for sustainable operation

Plus Series High Capacity

■ Carry up to 3 occupants plus materials and tools with max platform capacity of 1,000 lb

Robust Design

■ Heavy-duty steel construction and reinforced steering linkage provide unmatched durability and reliability

Intelligent Maintenance

■ Industry-leading 7-inch color screen and OTA functionality, providing the technicians with convenient access to live machine and maintenance information



Standard Features		
Automatic Platform Leveling	Overload sensing system	Foam-filled tires
Platform 160° hydraulic rotation	7" color display screen	4-wheel brake
Drive enable system	Fault diagnosis system	Emergency brake release
Fully proportional controls	Emergency stop system	4WDx2WS
Horn and buzzer alarms	Auxiliary lowering system	Full-time oscillation front axle
Rotating warning light	Max allowable inclination up to 5°	Foot pedal
Tilt protection	AC power to the platform	8' 1"(2.44m) platform
Optional Features		
4' 9"(1.45m) work platform	Telematics	Overhead anti-collision device
6'(1.83m) work platform	Platform work lights	Solid non-marking tires
Anti-crush device		

SINOBOOM™
— NORTH AMERICA

PARTNERS IN ACCESS™

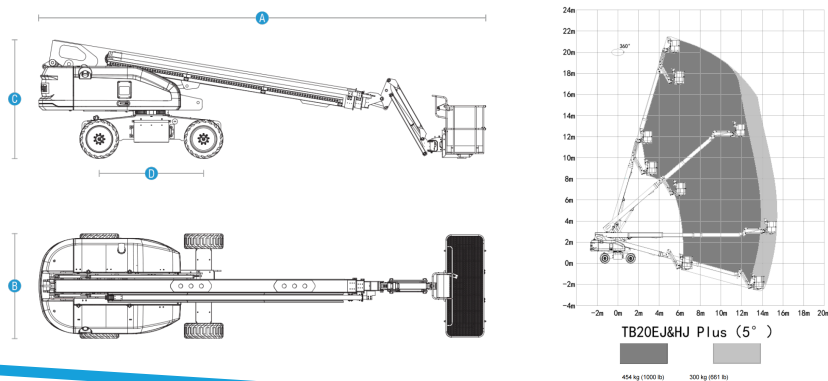
SINOBOOM.US | INFO@SINOBOOM.US
105 W RILEY ROAD, HOUSTON TX 77047

ELECTRIC TELESCOPIC BOOM LIFTS

TB660EJ PLUS

Compliant with ANSI/CSA standards

Model	TB660EJ Plus
Dimensions	
Max Working Height	71' 7" (21.8m)
Max Platform Height	65' 7" (20.0m)
Max Horizontal Extension(Restricted/Unrestricted)	45' 5" (13.85m)/50' 6" (15.4m)
A-Length Stowed	32' 9" (9.99m)
B-Width Stowed	8' 2" (2.49m)
C-Height Stowed	9' 2" (2.79m)
D-Wheelbase	8' 2" (2.49m)
Ground Clearance	1' 3" (0.39m)
Platform Dimensions(LxWxH)	8' x 3' x 3' 7" (2.44mx0.91mx1.1m)
Performance	
Platform Capacity(Restricted/Unrestricted)	1,000lbs(454kg) 3 persons/661lbs(300kg) 2 persons
Turntable Rotation	360° Continuous
Platform Rotation	160°
Drive Speed - Stowed	3mph(4.8km/h)
Drive Speed - Raised	0.68mph(1.1km/h)
Gradeability (4WD)	35%
Turning Radius (Inside/Outside)	7' 10" (2.4m)/18' 3" (5.55m)
Wind Resistance	28mph(12.5m/s)
Turntable Tailswing	4' 9" (1.45m)
Tilt Rating	5°
Drive x Steer	4WDx2WS
Maximum Allowable Lateral Force(Restricted/Unrestricted)	134lbf(600N)/90lbf(400N)
Tire Size/Type	355/65D625 (Foam-filled)
Power	
Batteries	48 V, 480 Ah (lead-acid) / 48 V, 500 Ah (lithium)
Auxiliary Power Unit	12V DC
System Voltage	48V DC
Hydraulic Tank Capacity	44.9 gal (US)(170L)
Weight	
Weight	25,358lbs(11,502kg)


SINOBOOM™
 NORTH AMERICA

PARTNERS IN ACCESS™